


GERMAN BRAND SOLAR PANEL
BIFACIAL DOUBLE GLASS
N-TYPE G12 HALF CELL MONO

720W

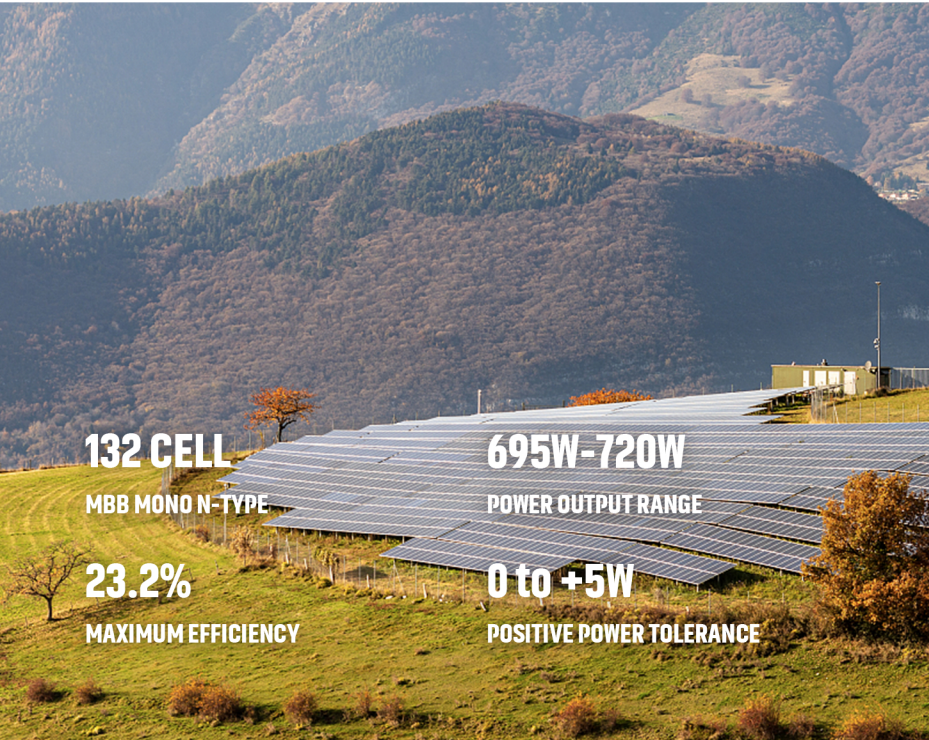

132 CELL

MBB MONO N-TYPE

23.2%

MAXIMUM EFFICIENCY

695W-720W

POWER OUTPUT RANGE

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power

Effectively reduce the unit cost of PV solar system by watt



Optimize the temperature coefficient

Improve the performance under the condition of shadow and low temperature coefficient



Reduce the shadow loss on the power output

Effectively reduce the risk of heat spot on high efficiency



Stronger the physical property

Optimize the property of power generating and reliability of the system

Module Type		HTS-132G12H695LDG		HTS-132G12H700LDG		HTS-132G12H705LDG		HTS-132G12H710LDG		HTS-132G12H715LDG		HTS-132G12H720LDG	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	P _{MAX} (W)	695	531	700	534	705	540	710	543	715	547	720	551
Maximum Power Voltage	V _{MPP} (V)	40.3	37.9	40.5	38.0	40.7	38.3	40.9	38.5	41.1	38.7	41.3	38.8
Maximum Power Current	I _{MPP} (A)	17.25	14.00	17.29	14.04	17.33	14.08	17.36	14.12	17.40	14.14	17.44	14.19
Open Circuit Voltage	V _{OC} (V)	48.3	45.9	48.6	46.1	48.8	46.3	49.0	46.5	49.2	46.7	49.4	46.9
Short Circuit Current	I _{SC} (A)	18.28	14.72	18.32	14.76	18.36	14.80	18.40	14.83	18.44	14.86	18.49	14.90
Tolerance	(W)	0 - +5		0 - +5		0 - +5		0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	22.4		22.5		22.7		22.9		23.0		23.2	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1
 NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN 10% FOR REFERENCE

Module Type	HTS-132G12H695LDG	HTS-132G12H700LDG	HTS-132G12H705LDG	HTS-132G12H710LDG	HTS-132G12H715LDG	HTS-132G12H720LDG
P _{max} (W)	765	770	776	781	787	792
V _{oc} (V)	48.3	48.6	48.8	49.0	49.2	49.4
I _{sc} (A)	20.11	20.15	20.20	20.24	20.28	20.34
V _{mp} (V)	40.3	40.5	40.7	40.9	41.1	41.3
I _{mp} (A)	18.98	19.02	19.06	19.10	19.14	19.18

MECHANICAL DATA

Solar Cells	Mono N-TYPE
Cell Orientation	132 (6 x 22)
Module Dimensions	2384 x 1303 x 33mm
Weight	38.3kg
Front Glass	2.0mm
Back Glass	2.0mm
Frame	Anodized Aluminium Alloy
J-Box	IP 68 Rated
Cables	4.0mm ² , 350mm or Customized Length
Connector	MC4 Compatible

PACKAGE Modules per Pallet: 34 pieces Modules per 40'HQ Container: 612 pieces


TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of P _{MAX}	-0.30%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	+0.046%/°C

MAXIMUM RATINGS

Operational Temperature	-40°C to +85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A
Mechanical Load	5400pa
Wind Load	2400pa

DIMENSIONS OF PV MODULE

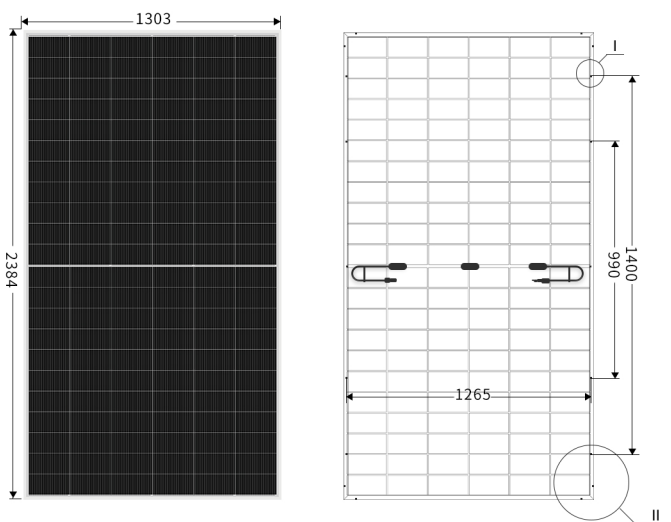

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty 30 Year Linear Power Warranty

